

OLYMPUS[®]

Your Vision, Our Future

Industrial Videoscope

IPLEX TX

IPLEX

2.4 mm Diameter Articulating Scope for Very Narrow Spaces



IPLEX TX


An articulating 2.4 mm diameter videoscope providing excellent image quality and durability

The IPLEX TX enables you to make inspections inside parts where access is limited due to very narrow openings. Combining its clear images and outstanding durability, the IPLEX TX is the ideal videoscope for routine inspections of castings, molds, and other parts with small cavities.

Ultra-thin



Excellent image




Tough



The world's smallest diameter videoscope with articulation*

Ultra-thin, 2.4 mm diameter

At just 2.4 mm diameter, the flexible insertion tube reaches inside almost any narrow or difficult to reach area that requires reliable and uncompromising visual inspection for defects.

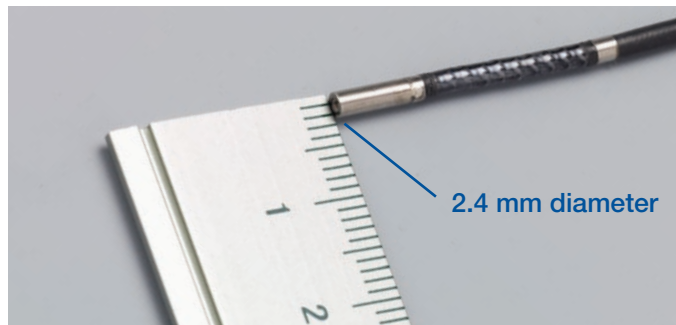

Quick and accurate articulation

The IPLEX TX is a videoscope with the world's smallest diameter* and is equipped with an ergonomic, user-friendly scope articulation controller. The controller features excellent responsiveness and quickly and accurately navigates the scope tip inside narrow and intricate objects.

*As of November 1, 2013



Tough design optimal for frequent use

Unsurpassed abrasion resistance

The IPLEX TX insertion tube is protected with a special resin tube that features 200 times greater abrasion resistance than our conventional extra-thin fiberscopes. The durable insertion tube enables reliable inspections of casting and other metals that have rough surfaces.



Ensured dust resistance

The IPLEX TX is both dust and drip proof, and is designed to comply with IP55. This durable unit can perform reliable inspections even in harsh manufacturing environments.



Interchangeable scope system

The IPLEX TX has an insertion tube that can be easily interchanged in the field.




Great advance in image quality

Exceptionally bright and clear images

Compared to conventional very small-diameter fiberscopes, the IPLEX TX delivers superior image quality. The videoscope's vivid and clear images increase the detection of abnormalities and improves inspection efficiency.




Monitor image via a conventional fiberscope



Monitor image on IPLEX TX

Precise image reproduction without halation

The unique image processing capability WiDER™ limits the halation effect that often occurs during inspections of metal objects. WiDER brings out details in shadow areas and produces much clearer, crisper images.

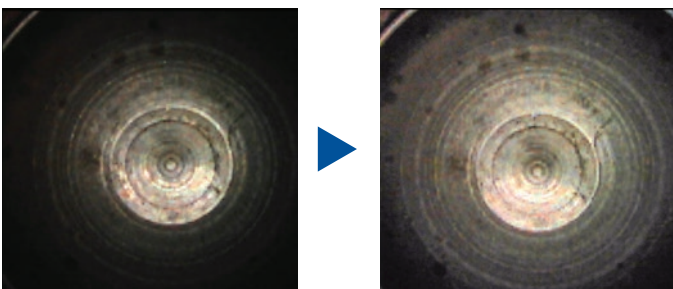

Large monitor, small body

The IPLEX TX is equipped with a 6.5 in. LCD monitor to clearly display tiny defects such as burrs and scratches.

The compact and portable body with an integrated Lithium-ion battery allows you to make inspections at any sites.



Efficient image management

High-quality images and movies

Observed images can be recorded onto a removable USB flash drive as high-quality JPEG still images and MPEG-4 movies. The provided 1 GB USB flash drive can store approximately 3,400 still images or a 30-minute movie.



Title input function

For efficient image diagnosis and report generation, the IPLEX TX enables you to insert titles as well as date and time overlay.



IPLEX TX Specifications*

SCOPE UNIT

Model No.	IV8212T	
Approximate weight	0.2 kg	
Insertion tube	Scope diameter ¹	ø2.4 mm
	Scope length	1.2 m
	Distal end ²	9.8 mm
	Exterior	High durability resin tube with special processing
	Tube flexibility	Uniformed stiffness
Optics	Direction of view	Forward
	Field of view	80°
	Depth of field ³	3 to 70 mm
	Illumination	High-intensity white LED
Articulation section	Articulation angle	135° (Up/Down)
	Articulation mechanics	Direct manipulation

*1. The insertion tube can be inserted into a 2.4 mm hole.

*2. Indicates the length of the rigid portion at the scope's distal end.

*3. Indicates the optimal focal distance.

MAIN UNIT

Model No.	IV8200T	
Approximate weight	1.7 kg (with battery or AC power adaptor)	
Dimensions (W x D x H)	227 mm x 64 mm x 189 mm; Maximum dimensions: 239 mm x 99 mm x 215 mm	
Handheld controller	Controllable functions	Live mode, WIDER™ Gain control, Brightness, Zoom, Freeze image, Record still/video, Articulation control, Articulation lock, Menu access, Saved recording index access, Quick last image recall.
	Approximate weight	0.3 kg
	Dimensions (W x D x L)	49 x 59 x 334 mm
LCD monitor	6.5 in. daylight-view LCD, anti-reflective type	
Power supply	Battery: 10.8 V nominal AC power: 100 V to 240 V, 50/60 Hz (with supplied AC adaptor)	
Output connector	RCA composite video output	
USB connector	Type A connector, Version 2.0 standards	
Software manipulations	Image manipulations	Seamless digital zoom from 0.5x to 2x, 8-step digital brightness control
	Adjustable gain control	3-step adjustable gain control with exclusive WIDER™ brightness level balancing technology
	Display text options	30-character title display
Recording management functions	Recording media	USB flash memory (1 GB standard, compatible with recommended USB flash device)
	Overlay	Selectable 30 character title with date, time and system setting
	Thumbnail image display	Recorded images can be displayed as thumbnails
	Still image recording	Resolution – NTSC: H640 x V480 (Pixel), PAL: H768 x V576 (Pixel)
		Recording format – Compressed JPEG format Size of a single image – Approximately 300 KB (approximately 3,400 images per 1 GB memory)
	Video recording	Resolution – H640 x V480 (Pixel) Recording format – AVI MPEG-4 format. Can be played on the Windows Media Player. Size of a single image – Approximately 500 KB per second (approximately 30 min. per 1 GB memory)


OPERATING ENVIRONMENT

Operating temperature	Insertion tube	In air: -25 to 80 °C In water: 10 to 30 °C
	Other parts	In air: -10 to 40 °C (with battery) 0 to 40 °C (with AC power adaptor)
Relative humidity	All parts	15% to 90%
Liquid resistance	All parts	Operable when exposed to machine oil, light oil or 5% saline solution.
Waterproofing	Insertion tube	Water pressure resistance: Up to equivalent of 1.2 m depth.
	Other parts	Operable in blowing rain conditions (battery compartment must be closed). Not operable under water.

Accessories

Lithium-ion Battery
NC2040NO29

Battery Charger
CH5000C (USA type)
CH5000X (European type)
The battery provides 150 minutes of operating time.



LCD Protection Sheet
Protects the IPLEX TX monitor from scratches and dirt.



Shoulder Belt

Enables you to operate the IPLEX TX while worn.



Protective Braid

Covers the IPLEX TX insertion tube providing additional protection when used in very coarse environments.



www.olympus-ims.com

OLYMPUS

For enquiries - contact
www.olympus-ims.com/contact-us

OLYMPUS CORPORATION
Shinjuku Monolith, 3-1Nishi-Shinjuku2-chome, Shinjuku-ku, Tokyo 163-0914,
Japan, Tel: 81 (0)3-6901-4039

OLYMPUS SCIENTIFIC SOLUTIONS AMERICAS CORP.
48 Woerd Avenue, Waltham, MA 02453, USA, Tel.: (1) 781-419-3900

OLYMPUS EUROPA SE & CO. KG
Wendenstrasse 14-18, 20097 Hamburg, Germany, Tel.: (49) 40-23773-0

OLYMPUS AUSTRALIA PTY. LTD.
31 Gilby Road, Mount Waverly, Victoria, 3149, Tel.: (61) 130-013-2992

OLYMPUS SINGAPORE PTE LTD.
Valley Point Office Tower, 248373, Tel: (65) 68-34-00-10



OLYMPUS SCIENTIFIC SOLUTIONS AMERICAS CORP.
is certified to ISO 9001, ISO 14001, and OHSAS 18001.

*All specifications are subject to change without notice.

All brands are trademarks or registered trademarks of their respective owners and third party entities.
Copyright © 2015 by Olympus.